

Date: March 8, 2022
File No. 82725-109-MX

ADDENDUM No. 2

PROJECT: New Municipal Complex Contract B – Building Construction

OWNER: Folcroft Borough 1555 Elmwood Avenue, Folcroft, PA 19032

ENGINEER: Elizabeth A. Catania, P.E., Borough Engineer

THE ATTENTION OF ALL BIDDERS IS CALLED TO THE FOLLOWING ADDENDUM

The following addendum amends and alters the plans and specifications for this project and takes precedence over related items therein. The acceptance of this addendum as part of the specifications must be stated in the proposal or the bid will be held to be invalid.

Attached are the cut sheets for the detention equipment.

PLEASE ACKNOWLEDGE RECEIPT OF ADDENDUM BY SIGNING AND EMAILING BACK TO
cgray@cataniaengineering.com

Company

Signature

Title

Date

Key: Prison Paracentric
Door: Sliding
Security Level: Maximum

30/30D LOCKS

Description

Series 30 locks are Deadlatches. Series 30D Deadlocks are lever tumbler, mechanical locks for sliding doors. Specify keying as follows:

- 32 Keyed cover side
- 36 Keyed both sides
- 32D Keyed cover side**
- 36D Keyed both sides

Applications

Series 30 Deadlatches are recommended for sliding doors requiring slam-locking, such as corridor or entrance doors. Doors should never be left unattended in open position. Not for use on cells. Specify handing.

Series 30D Deadlocks are recommended for use on sliding cell, corridor or entrance doors. Ideal for doors left open or unattended at times.

Standard Features

- **Automatic deadlocking (Series 30)** – Deadlocks on door closure, unlocks by key. Key is removable in the latch position only.
- **Mechanical operation (Series 30D)** – Deadlocks and unlocks by key. Key is removable in both locked and unlocked condition.
- **Durable case** – Ductile iron case with 3/16" thick steel cover.
- **Corrosion resistance** – Working parts are corrosion resistant.



30 Series Deadlatch
Right hand shown.



30D Series Deadlock
Right hand shown.

- **Heavy-duty lever tumblers** – 5 spring-temper brass tumblers, activated by heavy phosphor-bronze springs. Precision fit to locking fence.
- **Large, solid hookbolt** – Zinc plated, hardened steel, 1/2" thick.
- **Bolt movement** – 5/8" lift.
- **Investment-cast key cylinder** – One-piece bronze alloy with paracentric keyway.
- **Finish** – Zinc plated.


Optional Features

- **Mounting** – Hollow metal, grille or plate door mounting.

Accessories

(must be specified separately)


- **30-4B** – Mortise keeper with mounting screws.
- **30-4BL** – Mortise keeper with switch and mounting screws.
- **30-4DB** – Mortise keeper with dustbox and mounting screws.
- **30-4F** – Surface mounted keeper and mounting screws.



30-4BL



30-4DB



30-4F

For more information, please call 210.533.1231.



30/30D LOCKS

Key: Prison Paracentric
Door: Sliding
Security Level: Maximum


How to Order

Specify:


- 1) Quantity
- 2) Handing
- 3) Mounting required.
- 4) Key code instructions.
- 5) Accessories required.

Dimensional Data

Note: Dimensions are for information and planning purposes only, and should not be used as templates.

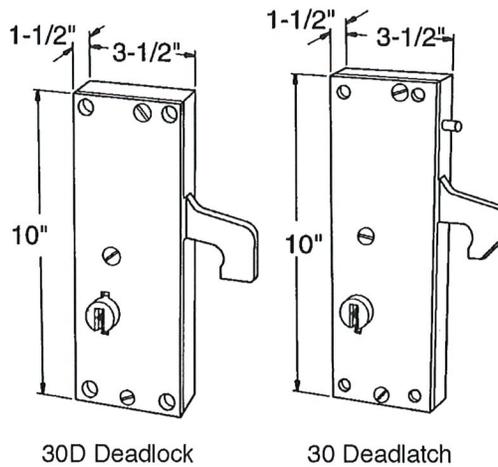

Specify circled swing number when ordering.

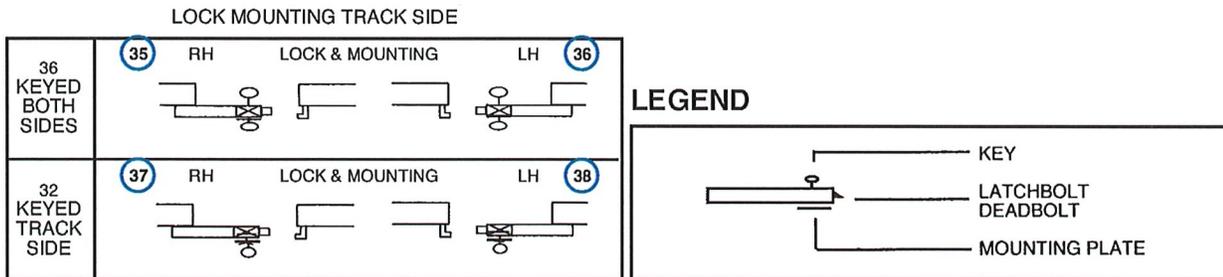

P.O. Box 2021, San Antonio, TX 78297 ■ Ph: 210.533.1231 ■ Fx: 210.533.2211
 Web: www.SouthernFolger.com ■ Email: info@southernfolger.com

Drive: Manual
Release: Individual
Security Level: Maximum

102 TRACK AND HANGER SETS

Description



Track and hanger sets are overhead supporting devices for manually-operated sliding doors ranging in width from 2'0" to 3'6" up to a maximum weight of 350 pounds.

Applications

Track and hanger sets may be used for cell or corridor doors on grille, masonry or plate wall construction. Three standard housing sizes suit most door sizes and applications. Specify type of wall for guide mounting.

Standard Features

- **Self-contained** – Each set consists of a track box and cover, door hanger with adjustable rollers for leveling, door guide and door guide angle.
- **Heavy housing construction** – 10-gauge steel with cold-finished steel track.
- **Sloped-top housing** – 10-gauge steel, sloped to prevent hiding of contraband.
- **Corrosion-resistance** – Working parts resist rust and corrosion.
- **Tamper-resistance** – Cover provided with tamper-resistant screws.
- **Adjustable door rollers** – Eccentric bushings permit adjustment to level the door.
- **Smooth operation** – Door rollers 3-3/4" x 1" thick, zinc plated steel with sealed, anti-friction bearings.
- **Adjustable door stop** – Steel block attached to track with setscrews.
- **Non-handed** – Reversible for doors sliding to right or left.

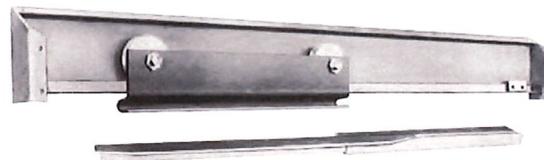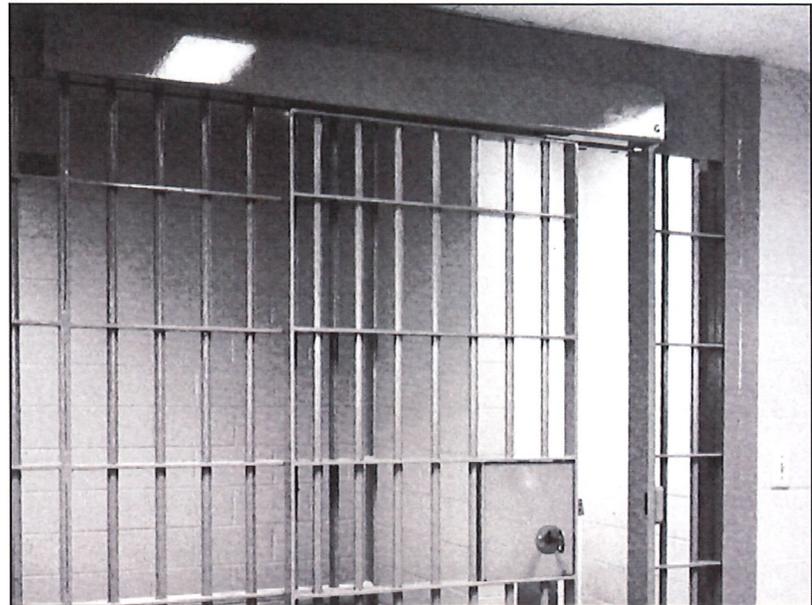

- **Finish** – USP Primed for painting.
 - **Rubber bumper** – Attached to doorstop, cushions door in the open position to reduce noise.
 - **Custom sizes** – Sets may be constructed for wider and heavier doors. Consult the factory with your specific application.
 - **Continuous housing** – Sets may be built to suit the width of a group of cells and may contain a wire tray for cell line cable connecting locks to a common point at the end of a cell run.
- ## Optional Features
- **Indication switch** – An internal switch monitors position of the door indicating either open or closed status. Add suffix "I" when ordering.
 - **Door starter** – A spring-loaded plunger to push a door slightly open after unlocking. Used with remote controlled electric locks or mechanical locks to move door open once unlocked. Add suffix "S" when ordering.

For more information, please call 210.533.1231.



Drive: Manual
 Release: Individual
 Security Level: Maximum

102 TRACK AND HANGER SETS

- Door receivers or electric lock columns – Receivers may be supplied to capture the front edge of the door. Lock columns provide a method of mounting a lock, protecting the wiring and installing the door receiver.

Electrical Characteristics

(Indication switch)

Single-pole, double-throw (SPDT),
 15 amps @ 125 or 250 VDC.


Dimensional Data

Note: Dimensions are for information and planning purposes only and should not be used as templates.


Models Available

Model	Description	Door Width	Cell Structure	Weight (lbs.)
102-1G	Track/hanger set	2'-0" – 2'-6"	Grille	95
102-1M	Track/hanger set	2'-0" – 2'-6"	Masonry	95
102-2G	Track/hanger set	2'-6" – 3'-0"	Grille	110
102-2M	Track/hanger set	2'-6" – 3'-0"	Masonry	110
102-3G	Track/hanger set	3'-0" – 3'-6"	Grille	125
102-3M	Track/hanger set	3'-0" – 3'-6"	Masonry	125

NOTE: When a door width falls between two track set sizes, specify the smaller size.

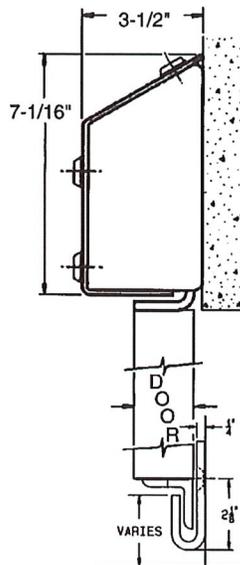

Masonry Installation

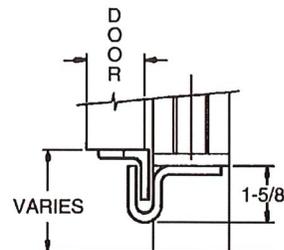

Grille Installation

