

Contact Information:

Owner:

CITY OF CHESTER POLICE DEPARTMENT  
160 E. 7th Street  
Chester, PA 19013  
TEL: 856.404.0540  
mgalanite@imgeassoc.com

Architect:

PHILLIPS | ASSOCIATES ARCHITECTS  
87 East Butler Avenue  
Ambler, PA 19002  
TEL: 215.646.7878  
www.pa-arch.com

Project Manager:

MS ENGINEERING ASSOCIATES, LLC  
334 W. Front Street  
Media, PA 19063  
Michael Galante  
TEL: 856.404.0540  
mgalanite@imgeassoc.com

Abbreviations:

|        |                    |        |                                            |        |                             |
|--------|--------------------|--------|--------------------------------------------|--------|-----------------------------|
| @      | AT                 | ELEC.  | ELECTRICAL                                 | PLAS.  | PLASTER                     |
| CL     | CENTERLINE         | EQ.    | EQUAL                                      | PLYWD. | PLYWOOD                     |
| #      | POUND OR NUMBER    | EQUIP. | EQUIPMENT                                  | P.T.   | PRESERVATIVE TREATED        |
| ADJ.   | ADJUSTABLE         | FJ     | FLOOR JOIST                                | PTD.   | PAINTED                     |
| A.F.F. | ABOVE FINISH FLOOR | F.O.   | FACE OF                                    | QT.    | QUARRY TILE                 |
| AL.    | ALUMINUM           | F.O.F. | FACE OF FINISH                             | RAD.   | RADIUS                      |
| ARCH.  | ARCHITECTURAL      | F.S.   | FRAME SIZE                                 | REF.   | REFRIGERATOR                |
| BLDG.  | BUILDING           | FIN.   | FINISH                                     | REQ.   | REQUIRED                    |
| BLKG.  | BLOCKING           | FIXT.  | FIXTURES                                   | RM.    | ROOM                        |
| BM.    | BEAM               | FL.    | FLOOR                                      | RO.    | ROUGH OPENING               |
| B.O.   | BOTTOM OF          | FT.    | FEET                                       | R/S    | HANGING ROD & SHELF ABOVE   |
| BOT.   | BOTTOM             | G.B.   | GRAB BAR                                   | RWC    | RAINWATER CONDUCTOR         |
| CAB.   | CABINET            | G.A.   | GAUGE                                      | S.     | SOUTH                       |
| CER.   | CERAMIC            | GC     | GENERAL CONTRACTOR                         | S.C.   | SOLID CORE                  |
| CJ     | CEILING JOIST      | GFI    | GROUND FAULT PROTECTED                     | S/S    | STAINLESS STEEL             |
| CLG.   | CEILING            | GL.    | GLASS                                      | SCHED. | SCHEDULE                    |
| CLKG.  | CAULKING           | GLAZ.  | GLAZING                                    | SIM.   | SIMILAR                     |
| CLO.   | CLOSET             | H.C.   | HOLLOW CORE                                | SPEC.  | SPECIFICATION               |
| COJ    | CONTROL JOINT      | HORIZ. | HORIZONTAL                                 | SQ.    | SQUARE                      |
| COL.   | COLUMN             | HT.    | HEIGHT                                     | SST.   | SIMPSON STRONG TIE          |
| CONC.  | CONCRETE           | HVAC   | HEATING, VENTILATION, AND AIR CONDITIONING | STD.   | STANDARD                    |
| CONT.  | CONTINUOUS         |        |                                            | STL.   | STEEL                       |
| CONTR. | CONTRACTOR         | JT.    | JOINT                                      | STOR.  | STORAGE                     |
| COORD. | COORDINATE         | LT.    | LIGHT                                      | SUSP.  | SUSPENDED                   |
| CPT    | CARPET             | MAX.   | MAXIMUM                                    | T.O.   | TOP OF                      |
| CT     | CERAMIC TILE       | MECH.  | MECHANICAL                                 | TEL.   | TELEPHONE                   |
| CTR.   | CENTER             | MFR.   | MANUFACTURER                               | THK.   | THICK                       |
| DBL.   | DOUBLE             | MIN.   | MINIMUM                                    | TYP.   | TYPICAL                     |
| DIA.   | DIAMETER           | MISC   | MISCELLANEOUS                              | U.O.N. | UNLESS OTHERWISE NOTED      |
| DIM.   | DIMENSION          | MLWK.  | MLWORK                                     | VERT.  | VERTICAL                    |
| DL.    | DAMP LOCATIONS     | MT.    | MARBLE THRESHOLD                           | V.I.F. | VERIFY IN FIELD             |
| DN.    | DOWN               | MTL.   | METAL                                      | VYL.   | VINYL                       |
| DR.    | DOOR               | N.     | NORTH                                      | W.     | WEST                        |
| DS.    | DOWNSPOUT          | N.I.C. | NOT IN CONTRACT                            | W/     | WITH                        |
| DTL.   | DETAIL             | N.T.S. | NOT TO SCALE                               | WC     | WATER CLOSET, WALL COVERING |
| DW.    | DISH WASHER        | O.C.   | ON CENTER                                  | WO     | WITHOUT                     |
| DWG.   | DRAWING            | OPP.   | OPPOSITE                                   | WR     | WATER RESISTANT             |
| EX.    | EXISTING           | P. LAM | PLASTIC LAMINATE                           | WP     | WEATHER PROOF               |
| EL.    | ELEVATION          | PL.    | PLATE                                      | WD.    | WOOD                        |

Symbol Key:

|  |                                                                                       |  |                    |
|--|---------------------------------------------------------------------------------------|--|--------------------|
|  | DOOR NUMBER                                                                           |  | ELEVATION TAG      |
|  | WINDOW NUMBER                                                                         |  | SECTION TAG        |
|  | CEILING HEIGHT                                                                        |  | ROOM ELEVATION TAG |
|  | REFERENCE NOTE TAG (DEMO, GENERAL NOTES, ETC.)                                        |  | PLAN DETAIL TAG    |
|  | REVISION NUMBER                                                                       |  | COLUMN TAG         |
|  | ELEVATION MARKER                                                                      |  |                    |
|  | FLOOR ELEVATION                                                                       |  |                    |
|  | WALL TAG                                                                              |  |                    |
|  | EXISTING DOOR                                                                         |  |                    |
|  | NEW DOOR<br>DESIGNATION SHOWN AS 3'x6' REFERS TO 3'-0" x 6'-8" DOOR. (SIZES MAY VARY) |  |                    |

Project Information:

PROJECT ADDRESS: 160 E. 7TH STREET, 2ND FLOOR  
CHESTER, PA 19013  
TOWNSHIP: CITY OF CHESTER  
COUNTY: DELAWARE  
CLIMATE ZONE: ZONE 4A  
ZONING: (CBD) CENTRAL BUSINESS DISTRICT  
BUILDING CODES: 2021 IBC AS AMENDED BY THE PA UCC  
2021 IECC AS AMENDED BY THE PA UCC  
ACCESSIBILITY: CHAPTER 11 OF 2018  
IBC & APPENDIX E AS ADOPTED  
BY THE PA UCC, ICC A117.1-2009  
2021 IEBC AS AMENDED BY THE PA UCC

Disclaimer:

- CONTRACTORS MUST CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS IN FIELD. ANY DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT IMMEDIATELY.
- PLANS, SPECIFICATIONS, REPORTS, DOCUMENTS, OR OTHER INFORMATION RECORDED ON OR TRANSMITTED AS ELECTRONIC MEDIA ARE SUBJECT TO UNDETECTABLE ALTERATION, EITHER INTENTIONAL OR UNINTENTIONAL, DUE TO, AMONG OTHER CAUSES, TRANSMISSION, CONVERSION, MEDIA DEGRADATION, SOFTWARE ERROR OR HUMAN ALTERATION. ALL SUCH DOCUMENTS ARE PROVIDED FOR INFORMATIONAL PURPOSES ONLY AND NOT AS AN END PRODUCT NOR AS A RECORD DOCUMENT. ANY RELIANCE THEREON IS DEEMED TO BE UNREASONABLE AND UNENFORCEABLE.
- ALL DRAWINGS, SPECIFICATIONS, AND RELATED DOCUMENTS ARE COPYRIGHT OF THE ARCHITECT AND MUST BE RETURNED UPON REQUEST. REPRODUCTION OF DRAWINGS, SPECIFICATIONS, AND RELATED DOCUMENTS IN PART OR WHOLE IS FORBIDDEN WITHOUT THE ARCHITECTS WRITTEN PERMISSION.
- THE EXISTING CONDITIONS INDICATED ON THESE PLANS ARE BASED ON VISUAL OBSERVATIONS ONLY. NO INVASIVE, DESTRUCTIVE OR ELECTRONIC MEANS HAVE BEEN UTILIZED TO DETERMINE CONDITIONS THAT ARE NOT VISIBLE TO THE NAKED EYE OR APPARENT IN THE EXERCISE OF DUE DILIGENCE. ANY THIRD PARTY USING OR RELYING UPON THESE PLANS AND THE INFORMATION INDICATED THEREON, DOES SO AT ITS OWN RISK.

General Notes:

- THE ARCHITECT IS NOT RESPONSIBLE FOR THE CONTRACTOR(S) MEANS AND METHODS OF CONSTRUCTION.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD. DISCREPANCIES BETWEEN ACTUAL CONDITIONS & DRAWINGS &/OR SPECIFICATIONS SHALL BE REPORTED TO THE ARCHITECT IN WRITING FOR CLARIFICATION. WORK SHALL NOT PROCEED UNTIL SUCH CLARIFICATION HAS BEEN RECEIVED.
- WRITTEN DIMENSIONS ON THE DRAWINGS SHALL HAVE PRECEDENCE OVER SCALED DIMENSIONS. THE CONTRACTOR SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS INDICATED ON THESE DRAWINGS.
- SHOULD LOCAL CODES AND/OR ORDINANCES DIFFER FROM THESE PLANS, A DETERMINATION SHALL BE MADE BY THE GENERAL CONTRACTOR AND/OR LOCAL BUILDING OFFICIAL, AS TO WHICH IS THE MOST STRINGENT. THE MOST STRINGENT REQUIREMENTS SHALL RULE. SHOULD A CHANGE IN THESE PLANS BE NECESSARY OR DESIRED WHICH WILL ALTER THE DESIGN OR STRUCTURAL INTEGRITY OF THE STRUCTURE(S), CONSULT WITH A QUALIFIED STRUCTURAL ENGINEER OR ARCHITECT TO VERIFY THAT SUCH A CHANGE WILL NOT BE DETRIMENTAL TO THE STRUCTURAL INTEGRITY OF THE STRUCTURE(S) PRIOR TO IMPLEMENTING THE CHANGE.
- THE CONTRACTOR IS RESPONSIBLE FOR THE SAFETY OF THE JOB SITE AND STRUCTURE INCLUDING THE DESIGN, ERECTION AND MAINTENANCE OF ALL SHORING, BRACING AND SAFETY BARRIERS.
- SHOULD UNFORESEEN CONDITIONS OR OTHER CAUSES NECESSITATE CONSTRUCTION DETAILS NOT IN ACCORDANCE WITH THESE PLANS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT AND SUBMIT DETAILS SHOWING THE PROPOSED METHODS TO ACCOMPLISH THE REQUIRED RESULTS.
- ALL MATERIALS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS.
- CONTRACTOR(S) SHALL BE FULLY RESPONSIBLE FOR ALL MATERIALS DELIVERED TO THE SITE AND WILL ASSUME OWNERSHIP OF SAME UNTIL THEY HAVE BEEN INSTALLED PROPERLY. FOR ITEMS SUPPLIED BY THE OWNER, OWNER IS RESPONSIBLE FOR TAKING DELIVERY AND FOR VERIFYING CONDITION PRIOR TO HANDOFF TO CONTRACTOR.
- FOR THE DURATION OF THE CONSTRUCTION PERIOD, THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR ALL DAMAGES CAUSED BY HIS WORKERS OR SUBCONTRACTORS' WORKERS. THE CONTRACTOR SHALL REPAIR AND/OR REPLACE ALL BROKEN PARTS, INCLUDING GLASS, AT NO ADDITIONAL COST TO THE OWNER AND BACK-CHARGE THIS TO THE RESPONSIBLE PARTY OR PARTIES. ALL OPENINGS DUE TO CONSTRUCTION IN EXTERIOR WALLS AND ROOFS OF THE EXISTING STRUCTURE SHALL BE CAREFULLY PROTECTED WITH TEMPORARY CLOSURES TO PREVENT THE ENTRANCE OF ANY WATER, SNOW, OR ICE INTO INTERIOR SPACES. ANY DAMAGE DUE TO WATER, SNOW, OR ICE SHALL BE FULLY REPAIRED BY THE CONTRACTOR AT NO COST WHATSOEVER TO THE OWNER.
- WORKMANSHIP SHALL CONFORM TO THE BEST TRADE PRACTICES. FINISHED SURFACES SHALL BE PLUMB AND LEVEL, STRAIGHT AND FREE OF IMPERFECTIONS AND SET FIRMLY TO ACCURATE MEASUREMENTS. FINISHED PRODUCT SHALL BE TOTALLY CLEAN AND FREE OF COVERING MATERIALS, LOOSE OR FOREIGN MATERIALS, ETC.
- THE CONTRACTOR IS EXPECTED TO KEEP THE ENTIRE PREMISES FREE OF DEBRIS, DISCARDED MATERIAL, ETC. UPON COMPLETION OF CONSTRUCTION, THE CONTRACTOR IS TO CLEAN THE EXTERIOR OF THE STRUCTURE AND THE SITE REMOVING ALL STAINS, DEBRIS, ETC. RESULTING FROM CONSTRUCTION. THE CONTRACTOR SHALL ALSO CLEAN ALL INTERIOR AREAS OF THE STRUCTURE IN THE AREAS OF NEW WORK. ALL GLASS, INSIDE AND OUT, SHALL BE COMPLETELY CLEANED.
- ALL PERMITS SHALL BE ACQUIRED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF DEMOLITION AND CONSTRUCTION. CONTRACTOR IS TO CONFIRM REGISTRATION REQUIREMENTS WITH THE MUNICIPALITY PRIOR TO CONSTRUCTION.
- CONTRACTOR TO BE RESPONSIBLE FOR SCHEDULING ALL INSPECTIONS - COORDINATE WITH THE MUNICIPALITY FOR APPROVED INSPECTORS LISTS.
- CONTRACTOR SHALL INSPECT THE PREMISES AND VIEW THE EXISTING CONDITIONS TO VERIFY ALL CONDITIONS, SIZES, AND QUANTITIES. EXISTING CONDITIONS WHICH MIGHT PRECLUDE OR INTERFERE WITH THE PROPOSED WORK AS DRAWN OR SPECIFIED SHALL BE BROUGHT THE THE ATTENTION OF THE OWNER FOR RESOLVING.
- ALL WORK TO BE PLUMB, LEVEL AND SQUARE. COORDINATE AND ALIGN STRUCTURE, FLOOR ELEVATIONS WITH EXISTING CONDITIONS WHERE REQUIRED.
- CONCEALED SURFACES OF DISSIMILAR MATERIALS TO HAVE APPLIED COATING OR BARRIER TO PREVENT CORROSION EFFECT OF GALVANIC ACTION.
- P+A DOES NOT GUARANTEE THE PERFORMANCE OF AND HAS NO RESPONSIBILITY FOR THE ACTS OR OMISSIONS OF ANY CONTRACTOR, SUBCONTRACTOR, SUPPLIER OR ANY OTHER ENTITY FURNISHING MATERIALS OR PERFORMING ANY WORK ON THIS PROJECT.
- IF DOOR SIZES ARE INDICATED ON PLANS, THESE INDICATE SIZE OF DOOR ONLY, NOT FRAME SIZE. IF DOORS ARE NUMBERED, REFER TO DOOR SCHEDULE. CONTRACTOR TO VERIFY ALL DOOR SIZES, ORIENTATION, OPERATION & HARDWARE (INCLUDING LOCKS) WITH OWNER PRIOR TO ORDERING.
- OBSERVATIONS PERFORMED BY P+A (WHEN ENGAGED FOR CONSTRUCTION OBSERVATIONS) SHALL NOT BE CONSIDERED A SUBSTITUTE FOR THE QUALITY CONTROL PROGRAMS AND PROCEDURES OF ANY CONTRACTOR, SUBCONTRACTOR, SUPPLIER OR ANY OTHER ENTITY FURNISHING MATERIALS OR PERFORMING ANY WORK ON THIS PROJECT.

Drawing List:

CS1 COVER SHEET & SPECIFICATIONS  
A1 THIRD FLOOR DEMOLITION PLAN  
A2 THIRD FLOOR PROPOSED PLAN  
A3 THIRD FLOOR REFLECTED CEILING PLAN

Energy Code:

CHART BELOW BASED ON THE 2021 IECC TABLE C402.1.3

| CLIMATE ZONE                        | 4 EXCEPT MARINE                    |                                    | 5 AND MARINE 4                     |                                    |
|-------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                     | ALL OTHER                          | GROUP R                            | ALL OTHER                          | GROUP R                            |
| ROOFS                               |                                    |                                    |                                    |                                    |
| INSULATION ENTIRELY ABOVE ROOF DECK | R-30ci                             | R-30ci                             | R-30ci                             | R-30ci                             |
| METAL BUILDINGS <sup>a</sup>        | R-19 + R-11 LS                     | R-19 + R-11 LS                     | R-19 + R-11 LS                     | R-19 + R-11 LS                     |
| ATTIC AND OTHER                     | R-49                               | R-49                               | R-49                               | R-49                               |
| WALLS ABOVE GRADE                   |                                    |                                    |                                    |                                    |
| MASS <sup>f</sup>                   | R-9.5ci                            | R-11.4ci                           | R-11.4ci                           | R-13.3ci                           |
| METAL BUILDING                      | R-13 + R-13ci                      | R-13 + R-14ci                      | R-13 + R-14ci                      | R-13 + R-14ci                      |
| METAL FRAMED                        | R-13 + R-7.5ci                     | R-13 + R-7.5ci                     | R-13 + R-10ci                      | R-13 + R-10ci                      |
| WOOD FRAMED AND OTHER               | R-13 + R-3.8ci or R-20             | R-13 + R-3.8ci or R-20             | R-13 + R-7.5ci or R-20 + R-3.8ci   | R-13 + R-7.5ci or R-20 + R-3.8ci   |
| WALLS BELOW GRADE                   |                                    |                                    |                                    |                                    |
| BELOW-GRADE WALL <sup>g</sup>       | R-7.5ci                            | R-10ci                             | R-7.5ci                            | R-10ci                             |
| FLOORS                              |                                    |                                    |                                    |                                    |
| MASS <sup>h</sup>                   | R-14.6ci                           | R-16.7ci                           | R-14.6ci                           | R-16.7ci                           |
| JOIST/FRAMING                       | R-30                               | R-30                               | R-30                               | R-30                               |
| SLAB ON GRADE FLOORS                |                                    |                                    |                                    |                                    |
| UNHEATED SLABS                      | R-15 FOR 24" BELOW                 | R-15 FOR 24" BELOW                 | R-15 FOR 24" BELOW                 | R-20 FOR 24" BELOW                 |
| HEATED SLABS <sup>i</sup>           | R-15 FOR 24" BELOW + R-5 FULL SLAB | R-15 FOR 24" BELOW + R-5 FULL SLAB | R-15 FOR 36" BELOW + R-5 FULL SLAB | R-15 FOR 36" BELOW + R-5 FULL SLAB |

g = Continuous insulation, NR = No Requirement, LS = Linear System.  
a. Assembly descriptions can be found in ANSI / ASHRAE / IESNA Appendix A.  
b. Where using R-value compliance method, a thermal spacer block shall be provided, otherwise use the U-factor compliance method in Table C402.1.4.  
c. R-5.7ci is allowed to be substituted with concrete block walls complying with ASTM C90, ungrouted or partially grouted at 32 inches or less on center vertically and 48 inches or less on center horizontally, with ungrouted cores filled with materials having a maximum thermal conductivity of 0.44 Btu-in/h<sup>2</sup>-ft<sup>2</sup>-°F.  
d. Where heated slabs are below grade, below-grade walls shall comply with the exterior insulation requirements for heated slabs.  
e. "Mass floors" shall be in accordance with Section C402.2.3.  
f. "Mass walls" shall be in accordance with Section C402.2.2.  
g. The first value is for perimeter insulation and the second value is for slab insulation. Perimeter insulation is not required to extend below the bottom of the slab.  
h. "Mass floors" shall be in accordance with Section C402.2.3.  
i. "Mass walls" shall be in accordance with Section C402.2.2.

OUTLINE SPECIFICATIONS:

**GENERAL**  
THIS IS A GENERAL UNDERSTANDING OF BUILDING MATERIALS AND/OR PROCEDURES TO BE USED IN THIS PROJECT AND ARE NOT FULL SPECIFICATIONS. ALTERNATE METHODS AND/OR SUBSTITUTE MATERIALS SHALL BE USED WITH THE FULL UNDERSTANDING AND APPROVAL OF THE PROJECT OWNER AND ARCHITECT. DISREGARD REFERENCES TO ITEMS WHICH DO NOT OCCUR IN THIS PROJECT.  
ALL WORK WAS DESIGNED TO AND SHALL CONFORM TO THE 2021 INTERNATIONAL BUILDING CODE.  
STRUCTURAL SECTIONS AND DETAILS SHALL BE CONSIDERED TYPICAL FOR SIMILAR CONDITIONS THAT DO NOT HAVE A SPECIFIC SECTION INDICATED, AND SHALL BE PROVIDED AT NO ADDITIONAL COST TO THE OWNER.  
CONSTRUCTION SEQUENCES SHALL ALLOW FOR MATERIAL MOVEMENT DUE TO TEMPERATURE EFFECTS DURING THE CONSTRUCTION PERIOD PRIOR TO THE BUILDING BEING ENCLOSED AND THE ENVIRONMENT CONTROLLED. ANY FROST HEAVING OF FOUNDATIONS OR SLAB ON GRADE, CRACKING, ADJUSTMENTS, ETC. DUE TO THERMAL EFFECTS SHALL BE CORRECTED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.  
**LIGHT GAUGE, NON-LOAD BEARING, METAL FRAMING:**  
A. STEEL STUDS & RUNNERS-ASTM C 645, W/ MIN BASE-METAL THICKNESS 20 GAUGE, 0.0312"  
B. SLIP-TYPE HEAD JOINTS: WHERE INDICATED, PROVIDE ONE OF THE FOLLOWING:  
1. SINGLE LONG-LEG RUNNER SYSTEM: ASTM C 645 TOP RUNNER WITH 2-INCH DEEP FLANGES IN THICKNESS NOT LESS THAN INDICATED FOR STUDS, INSTALLED WITH STUDS FRICTION FIT INTO TOP RUNNER AND WITH CONTINUOUS BRIDGING LOCATED WITHIN 12 INCHES OF THE TOP OF STUDS TO PROVIDE LATERAL BRACING.  
2. DOUBLE-RUNNER SYSTEM: ASTM C 645 TOP RUNNERS, INSIDE RUNNER WITH 2" DEEP FLANGES IN THICKNESS NOT LESS THAN INDICATED FOR STUDS AND FASTENED TO STUDS, AND OUTER RUNNER SIZED TO FRICTION FIT INSIDE RUNNER.  
3. DEFLECTION TRACK: STEEL SHEET TOP RUNNER MANUFACTURED TO PREVENT CRACKING OF FINISHES APPLIED TO INTERIOR PARTITION FRAMING RESULTING FROM DEFLECTION OF STRUCTURE ABOVE, IN THICKNESS NOT LESS THAN INDICATED FOR STUDS AND IN WIDTH TO ACCOMMODATE DEPTH OF STUDS.  
C. FLAT STRAP AND BACKING PLATE: STEEL SHEET FOR BLOCKING AND BRACING IN LENGTH AND WIDTH INDICATED.  
1. COLD-ROLLED CHANNEL BRIDGING: 0.038" BARE-STEEL THICKNESS W/ MIN. 1/2" WIDE FLANGES, DEPTH 1-1/2 INCHES.  
2. HAT-SHAPED, RIGID FURRING CHANNELS: ASTM C 645, DEPTH AS INDICATED ON DRAWINGS.  
3. RESILIENT FURRING CHANNELS: 7/8" DEEP, STEEL SHEET MEMBERS DESIGNED TO REDUCE SOUND TRANSMISSION.  
4. COLD-ROLLED FURRING CHANNELS: 0.038-INCH BARE-STEEL THICKNESS, WITH MINIMUM 1/2-INCH WIDE FLANGES.  
5. Z-SHAPED FURRING: WITH SLOTTED OR NON-SLOTTED WEB, FACE FLANGE OF 1-1/4 INCHES, WALL ATTACHMENT FLANGE OF 7/8 INCH, MIN. BARE-METAL THICKNESS OF 0.0175 INCH, AND DEPTH REQUIRED TO FIT INSULATION THICKNESS INDICATED.  
6. COLUMN AND BEAM DRYWALL CLIPS: SIMILAR TO GRABER X328, CLIP SPACING AT 24" ON CENTER.

THERMAL AND MOISTURE PROTECTION

CONTRACTOR SHALL REPAIR ANY DAMAGED OR ROTTED SHEATHING BEFORE WORK IS STARTED. SHEATHING SURFACES SHALL BE SMOOTH, FIRM, DRY & FREE FROM LOOSE BOARDS, LARGE CRACKS & PROJECTING ENDS. VENTS AND OTHER PROJECTIONS THROUGH SHEATHING SHALL BE PROPERLY FLASHED AND SECURED IN POSITION.  
**MINERAL WOOL BATT INSULATION:** SHALL BE OWENS CORNING THERMAFIBER ULTRABATT, OR APPROVED EQUAL, UNFACED. SEMI-RIGID MINERAL WOOL BATTS SIZED TO FRICTION-FIT STUD/JOIST CAVITIES. INSULATION SHALL BE NONCOMBUSTIBLE, MOISTURE-RESISTANT, NON-CORROSIVE, AND MOLD-RESISTANT. R-VALUES SHALL BE INDICATED ON THE PLANS. WHERE INSTALLED WITHIN A FIRE-RATED WALL ASSEMBLY, INSULATION SHALL COMPLY WITH THE SPECIFIC UL (OR OTHER LISTING AGENCY) RATED ASSEMBLY INDICATED ON THE PLANS.

**MINERAL WOOL SOUND ATTENUATION INSULATION:** SHALL BE OWENS CORNING THERMAFIBER SAFB (SOUND ATTENUATION FIRE BLANKETS), OR APPROVED EQUAL, UNFACED MINERAL WOOL BATTS FRICTION-FIT INTO WALL, FLOOR-CEILING, OR PARTITION CAVITIES AS INDICATED. INSULATION SHALL BE NONCOMBUSTIBLE AND SHALL PROVIDE THE FIRE AND ACOUSTICAL (STC) PERFORMANCE SHOWN ON THE PLANS, INSTALLED PER MANUFACTURER'S INSTRUCTIONS. WHERE INSTALLED WITHIN A FIRE-RATED WALL OR FLOOR-CEILING ASSEMBLY, INSULATION SHALL COMPLY WITH THE SPECIFIC UL (OR OTHER LISTING AGENCY) RATED ASSEMBLY INDICATED ON THE PLANS.

**INSULATION:** (IECC 2021 SECTION C402) SEE PLANS FOR R-VALUES. VERIFY VALUES WITH LOCAL CODE OFFICIALS  
**FOAMED-IN-PLACE INSULATION:** PROVIDE AIRTIGHT CLOSED-CELL SPRAY FOAM INSULATION WHERE INDICATED. FOLLOW ALL MANU-F'S RECOMMENDATION FOR APPLICATION. CERTAIN APPLICATIONS REQUIRE THERMAL / IGNITION BARRIER. REFER TO 2021 IBC SECTION 2603.  
**SEALANTS:**  
**INTERIOR:** ACRYLIC LATEX SEALANT: FOR USE BETWEEN JOINTS OF FIELD PAINTED METAL, GYPSUM, PLASTER, CONCRETE & MASONRY (BASIS OF DESIGN: TREMCO TREMSTOP FYRE-SIL)  
**FIRE STOPPING:** FOAMED IN PLACE SEALANT: FOR USE IN FIRE-RATED ASSEMBLIES INVOLVING MULTIPLE PIPE & CONDUIT PENETRATIONS

Finish Schedule:

| ROOM FINISH SCHEDULE                                                                                |                |       |                                                                                                  |       |       |                                                                                                                                                                                                                                                                                                                                                                                           |                         |         |          |                      |
|-----------------------------------------------------------------------------------------------------|----------------|-------|--------------------------------------------------------------------------------------------------|-------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------|----------|----------------------|
| ROOM NO.<br>(XXX)                                                                                   | ROOM NAME      | FLOOR | BASE                                                                                             | WALL  |       |                                                                                                                                                                                                                                                                                                                                                                                           |                         | CEILING | COMMENTS |                      |
|                                                                                                     |                |       |                                                                                                  | NORTH | SOUTH | EAST                                                                                                                                                                                                                                                                                                                                                                                      | WEST                    | FINISH  |          |                      |
| 301                                                                                                 | IT-SERVER ROOM | CPT-1 | RB                                                                                               | PT1   | PT1   | PT1                                                                                                                                                                                                                                                                                                                                                                                       | PT1                     | ACT1    |          |                      |
| 302                                                                                                 | OFFICE         | CPT-1 | RB                                                                                               | PT1   | PT1   | PT1                                                                                                                                                                                                                                                                                                                                                                                       | PT1                     | ACT1    |          |                      |
| 303                                                                                                 | OFFICE         | CPT-1 | RB                                                                                               | PT1   | PT1   | PT1                                                                                                                                                                                                                                                                                                                                                                                       | PT1                     | ACT1    |          |                      |
| 304                                                                                                 | OPEN OFFICE    | CPT-1 | RB                                                                                               | PT1   | PT1   | PT1                                                                                                                                                                                                                                                                                                                                                                                       | PT1                     | ACT1    |          |                      |
| 305                                                                                                 | INTERVIEW ROOM | CPT-1 | RB                                                                                               | PT1   | PT1   | PT1                                                                                                                                                                                                                                                                                                                                                                                       | PT1                     | ACT1    |          |                      |
| NOTES:                                                                                              |                |       |                                                                                                  |       |       | FINISHES AND ABBREVIATIONS                                                                                                                                                                                                                                                                                                                                                                |                         |         |          |                      |
| 1.                                                                                                  |                |       |                                                                                                  |       |       | ACT                                                                                                                                                                                                                                                                                                                                                                                       | ACOUSTICAL CEILING TILE |         | RB       | RUBBER COVE BASE     |
|                                                                                                     |                |       |                                                                                                  |       |       | CPT                                                                                                                                                                                                                                                                                                                                                                                       | CARPET                  |         | VB       | VINYL BASE           |
|                                                                                                     |                |       |                                                                                                  |       |       | EXST                                                                                                                                                                                                                                                                                                                                                                                      | EXISTING TO REMAIN      |         | VCT      | VINYL COMPOSITE TILE |
|                                                                                                     |                |       |                                                                                                  |       |       | PT                                                                                                                                                                                                                                                                                                                                                                                        | PAINT                   |         |          |                      |
| ROOM FINISH KEY                                                                                     |                |       |                                                                                                  |       |       | GENERAL FINISH NOTES                                                                                                                                                                                                                                                                                                                                                                      |                         |         |          |                      |
| VINYL COMPOSITION TILE                                                                              |                |       | PAINT                                                                                            |       |       | 1. PROVIDE ACCESSIBLE METAL OR VINYL TRANSITION STRIPS AT FLOOR MATERIAL TRANSITIONS, TYPICAL.<br><br>2. ALL HOLLOW METAL DOOR FRAMES TO BE PAINTED PT2, UNLESS OTHERWISE NOTED.<br><br>3. TRIM PAINT TO BE SEMI-GLOSS FINISH, WALL PAINT TO BE SATIN FINISH, AND CEILING PAINT TO BE MATTE FINISH, TYPICAL U.O.N.<br><br>4. ALL SOFFITS / FASCIA TO MATCH WALL MATERIAL AND COLOR U.O.N. |                         |         |          |                      |
| CODE: VCT-1<br>MANUFACTURER: JOHNSONITE<br>STYLE: TARKETT VCT II<br>COLOR: CLOUDY 572               |                |       | CODE: PT1<br>MANUFACTURER: SHERMAN WILLIAMS<br>PRODUCT: SW 9542<br>COLOR: NATURAL WHITE          |       |       |                                                                                                                                                                                                                                                                                                                                                                                           |                         |         |          |                      |
| ACOUSTICAL CEILING TILE                                                                             |                |       | CODE: PT2<br>MANUFACTURER: SHERMAN WILLIAMS<br>PRODUCT: SW 6258<br>COLOR: TRICORN BLACK          |       |       |                                                                                                                                                                                                                                                                                                                                                                                           |                         |         |          |                      |
| CODE: ACT1<br>MANUFACTURER: USG<br>PRODUCT: RADAR BASIC, ITEM# 2919<br>24x60, 5/8" THK, SQUARE EDGE |                |       |                                                                                                  |       |       |                                                                                                                                                                                                                                                                                                                                                                                           |                         |         |          |                      |
| RUBBER BASE                                                                                         |                |       | CARPET TILE                                                                                      |       |       | WOOD STAIN DOORS                                                                                                                                                                                                                                                                                                                                                                          |                         |         |          |                      |
| CODE: RB<br>MANUFACTURER: JOHNSONITE<br>COLOR: 40 - BLACK                                           |                |       | CODE: CPT-1<br>MANUFACTURER:TANDUS CENTIVA<br>STYLE: COLORMAP 11130<br>COLOR: TOMORROWLAND 42801 |       |       | CODE: ST-1<br>MANUFACTURER: MARSHFIELD<br>SPECIES: WHITE MAPLE<br>COLOR: MATCH EXIST DOOR STAIN & FINISH<br>HARDWARE: LOCKSET, KEYING, CARD READERS, KEYPADS & OTHER SECURITY MEASURES TO BE COORDINATED WITH POLICE DEPARTMENT OFFICIALS<br>HINGES: HAGER (3) QTY - BB1279 4.5 X 4.5 - US26D<br>LOCKSET: P200<br>SEALS: AT INTERVIEW ROOM - PEMKO STC 4D SEAL SET (INCLUDING THRESHOLD)  |                         |         |          |                      |

(BASIS OF DESIGN: DAP FIREBLOCK FOAM POLYURETHANE)  
**ONE-PART FIRE STOP SEALANT:** FOR USE IN FIRE-RATED ASSEMBLIES INVOLVING SINGLE PIPE & CONDUIT PENETRATIONS & NARROW JOINTS (BASIS OF DESIGN: TREMCO TREMSTOP FYRE-SIL)  
**FINISHES**  
VERIFY ALL COLORS & FINISHES OF ALL FINISH ITEMS: FLOOR COVERINGS, PAINT, FIXTURES, PLATES & SIDING W/ OWNER  
**GYPSUM WALLBOARD (GWB):** UNITED STATES GYPSUM (USG) OR APPROVED EQUAL. 1/2" GYPSUM WALLBOARD AT ALL INTERIOR SURFACES UNLESS NOTED OTHERWISE. USE MOLD RESISTANT TYPE AT SHOWERS, TUBS, SINKS, AND ANY OTHER WET LOCATIONS. TAPE ALL JOINTS AND FINISH SMOOTH (LEVEL 4 FINISH). NOTE: WHERE TILE IS TO BE INSTALLED AT TUBS AND SHOWERS, INSTALL FIBERGLASS MAT WATER RESISTANT GYPSUM BACKING PANEL (GEORGIA PACIFIC-DENSGUARD TILE BACKER OR EQUAL)  
**PAINT:** SURFACES TO BE PAINTED OR STAINED SHOULD BE PROPERLY CLEANED AND PREPARED TO RECEIVE FINISH. ALL EXTERIOR PAINT AND STAINS SHOULD BE ALLOWED 48 HOURS TO DRY BETWEEN COATS; INTERIOR FINISHED SHOULD BE ALLOWED 24 HOURS BETWEEN COATS TO DRY (BASIS OF DESIGN: FINNERAN & HALEY)  
**EXTERIOR:** WOOD: (1) COAT ACRYLIC PRIMER, PORTER OR APPROVED EQUAL PLUS (2) COATS ACRYLIC LATEX SEMI-GLOSS  
METAL: (1) COAT CEMENT OIL PRIMER (RUST #HIBITVE) PLUS (2) COATS ALKYLID ENAMEL, EGGSHELL  
MASONRY: (1) COAT ACRYLIC BONDING PRIMER PLUS (2) COATS ACRYLIC LATEX FLAT SHEEN  
**INTERIOR:** GWB: (1) COAT ACRYLIC PRIMER PLUS (2) COATS FLAT LATEX WALL PAINT  
METAL: (1) COAT OIL BASED PRIMER OR WHITE LACQUER UNDERCOATER PLUS (2) COATS ENAMEL SEMI-GLOSS  
WOOD: (1) COAT ACRYLIC PRIMER PLUS (2) COATS ALKYLID ENAMEL, EGGSHELL  
**ACOUSTICAL CEILING TILE (ACT):** PROVIDE TILE AND GRID SYSTEM IN AREAS DESIGNATED - SEE FINISH SCHEDULE  
**HVAC**  
FURNISH & INSTALL SERVICES, EQUIPMENT, CONTROLS, DUCTWORK, INSULATION, GRILLES, REGISTERS, REFRIGERANT PIPING & OTHER MATERIALS AS REQUIRED TO MEET ENERGY CODE. CONTACT LOCAL CODE OFFICIAL TO VERIFY ALL REQUIREMENTS. HVAC CONTRACTOR TO PROVIDE DESIGN AND DOCUMENTS IN COMPLIANCE WITH ALL CODES AS REQUIRED BY LOCAL MUNICIPALITIES. CONTRACTOR TO COORDINATE WITH ARCHITECT ON REQUIRED CHASES PRIOR TO FRAMING. CONTRACTOR SHALL VERIFY DRYER VENTING TO CONVEY ALL MOISTURE & ANY PRODUCTS OF COMBUSTION TO THE EXTERIOR.  
**ELECTRICAL**  
ELECTRICAL PLANS ARE DIAGRAMMATIC & SHOULD BE FOLLOWED AS CLOSELY AS ACTUAL CONSTRUCTION CONDITIONS AND WORK OF OTHER TRADES PERMIT. FURNISH AND INSTALL ALL WIRING, PANEL BOXES, CIRCUIT BREAKERS, SWITCHES, RECEPTACLES, ETC. FOR A COMPLETE WORKING ELECTRICAL SYSTEM. SIZE OF SERVICE, LAYOUT OF CIRCUITS, ETC. BY ELECTRICAL ENGINEER. CONTACT CODE OFFICIAL TO VERIFY ALL ELECTRICAL REQUIREMENTS. REFER TO CURRENT IBC-CHAPTER 27 AND CURRENT NEC CODE REQUIREMENTS FOR ALL ELECTRICAL DEVICE CONFIGURATION. VERIFY THAT SMOKE ALARMS INSTALLED WITHIN A DWELLING UNIT SHALL BE INTERCONNECTED IN SUCH A MANNER THAT THE ACTIVATION OF ONE ALARM WILL ACTIVATE ALL THE ALARMS IN THAT INDIVIDUAL UNIT. PROVIDE STEEL PLATE "RACO" PROTECTORS TO PROTECT ALL NON-METALIC SHEATHED CABLES WITHIN 1'-14" OF THE EDGE OF A STUD.



SCALE: 1/8" = 1'-0"



E 7TH STREET

## DEMOLITION GENERAL NOTES


1. DO NOT SCALE DRAWINGS.
2. ENSURE AREA OF DEMOLITION IS ENTIRELY ON THE SUBJECT PROPERTY. MAINTAIN EXISTING EASEMENTS SHARED BY NEIGHBORING PROPERTIES.
3. PROTECT ADJACENT PROPERTIES FROM DAMAGE & DEMOLITION DEBRIS; PROTECT PEDESTRIANS, VEHICLES, AND THE PUBLIC RIGHT-OF-WAY FROM DEMOLITION DEBRIS.
4. ENSURE ALL GAS, WATER, ELECTRIC AND ALL UTILITIES SUPPLYING THE SITE HAVE BEEN PROPERLY DISCONNECTED OR SHUT OFF PRIOR TO COMMENCEMENT DEMOLITION.
5. CUT, REMOVE AND DISPOSE OF ALL DRAWINGS ARE GENERAL INDICATIONS ONLY AND MAY NOT SHOW FULL EXTENT OF THE WORK TO BE REMOVED. FIELD VERIFY THE COMPLETE SCOPE OF THE WORK.
6. BEFORE BEGINNING ANY CUTTING OR DEMOLITION WORK, CONTRACTOR SHALL CAREFULLY SURVEY CONDITIONS AND DETERMINE THE EXTENT OF THE WORK TO BE DONE.
7. COORDINATE WITH ARCHITECT & STRUCTURAL ENGINEER PRIOR TO ANY CUTTING OR DEMOLITION WORK.
8. PROVIDE AND MAINTAIN BRACING AND SHORING TO PROTECT THE STRUCTURAL INTEGRITY OF THE EXISTING STRUCTURE TO REMAIN. SHORING SHALL BE REMOVED AS WORK PROGRESSES.
9. PRIOR TO DEMOLITION, COORDINATE WITH OWNER ALL ITEMS TO BE REMOVED AND STORED FOR LATER USE.
10. REMOVALS SHALL BE PERFORMED WITHOUT DAMAGE TO ADJACENT RETAINED WORK, HOWEVER WHERE SUCH WORK IS DAMAGED BY THE CONTRACTOR SHALL PATCH, REPAIR OR OTHERWISE RESTORE DAMAGED ITEMS TO THEIR ORIGINAL CONDITION, TO THE SATISFACTION OF THE OWNER, AT NO ADDITIONAL COST TO THE OWNER.
11. REMOVE WALLS, PARTITIONS, DOORS, WINDOWS, AND EQUIPMENT AS INDICATED ON FLOOR PLANS. REMOVE ALL DEBRIS FROM BUILDING AND LEAVE CLEAN.
12. REMOVE ALL EXISTING MASONRY WALLS FOR NEW OPENINGS AND NEW STEEL COLUMNS, WHERE NEW OPENINGS ARE TO BE PROVIDED IN EXISTING MASONRY WALLS, EXISTING MASONRY SHALL BE REMOVED TO THE FULL DEPTH OF THE CURT CURT, VERTICAL EDGES SHALL BE PLUMB AND HORIZONTAL EDGES SHALL BE LEVEL, MASONRY UNITS TO BE REMOVED SHALL BE SHOWN ON DRAWINGS. WHERE NECESSARY, IT MAY BE NECESSARY TO PROVIDE OPENINGS OF THE SIZES INDICATED.
13. WIRING, SWITCHES AND OUTLETS SHALL BE REMOVED AS NECESSARY TO COMPLETE WORK INDICATED, WHERE WIRING IS TO REMAIN, IT SHALL BE PROTECTED BY COVERING WITH THE NEAREST OUTLET OR JUNCTION BOX TO REMAIN IN SERVICE.
14. WHERE EXISTING ELECTRICAL WORK IS AFFECTED BY DEMOLITION OR NEW CONSTRUCTION, RELOCATE AS NECESSARY AND COORDINATE WITH ELECTRICAL WORK.
15. WHERE MECHANICAL AND ELECTRICAL EQUIPMENT HAS BEEN REMOVED, REMOVE EXISTING HANGERS FOR EACH EQUIPMENT.
16. VERIFY WITH OWNER ON EXTENT OF FLOOR FINISH REMOVAL AND REPAIRS.
17. REMOVE CEILING FINISHES AS REQUIRED IN AREAS OF WORK PATCH AS REQUIRED UPON COMPLETION

### DEMOLITION KEY NOTES

- 1 REMOVE GYP WALL FINISH AND PREPARE WALL FOR NEW FINISH. INSPECT ALL METAL STUDS. NOTIFY PROJECT MANAGER OF ANY DAMAGED STUDS. REPLACE AS REQUIRED - SEE DETAIL 2/2.
- 2 REMOVE CARPET (TILE) AND WALL BASE THROUGHOUT. PREPARE AREA FOR NEW FINISH
- 3 REMOVE VERTICAL BLINDS AND ASSOCIATED HARDWARE.
- 4 REMOVE CEILING TILE, LIGHT FIXTURES, AND HVAC GRILLS. SALVAGE HVAC GRILLS FOR RE-USE (CEILING GRID TO BE RE-USED). REMOVE ALL UNDAMAGED 2x6 CEILING TIRES FOR REUSE BY OWNER. COORDINATE WITH OWNER ON LOCATION OF STORAGE AREAS.
- 5 REMOVE BUILT-IN SHELF.
- 6 REMOVE LOOSE / DAMAGED FINISH ON WALL PANEL & PREPARE FOR NEW FINISH.
- 7 REMOVE ALL DAMAGED GYP AROUND COLUMNS. INSPECT ALL METAL STUDS - NOTIFY PROJECT MANAGER OF ANY DAMAGED STUDS - REPLACE AS REQUIRED - SEE DETAIL 2/2.
- 8 REMOVE DOOR - SALVAGE ALL ACOUSTICAL PANELS ON DOOR FOR REAPPLYING TO NEW DOOR. IF UNABLE TO REUSE, PROVIDE NEW.
- 9 REMOVE AND TAG LOCATION OF ALL PERIMETER RADIATOR COVERS. STORE FOR RE-INSTALLATION WHEN WORK IS COMPLETED.

## WALL KEY

- |                                                                                       |                                      |
|---------------------------------------------------------------------------------------|--------------------------------------|
|  | ITEMS TO BE DEMOLISHED               |
|  | EXISTING TO REMAIN                   |
|  | INDICATES HEIGHT OF EXISTING SURFACE |
|  | NO WORK IN THIS AREA                 |



Plans, specifications, reports, documents, or other information provided, transmitted, or otherwise made available, in whole or in part, for any intentional or unintentional, due to, among other causes, transmission, conversion, media degradation, software error or human alteration, all such documents are provided for informational purposes only and not as an end product nor as a record document. Any reliance thereon is deemed to be unreasonable and unacceptable.

All drawings, specifications, and related documents are copyright of the architect and must be returned upon request; reproduction of drawings, specifications and related documents in part or whole is forbidden without the architect's written permission.

Do not scale drawings

PA Registration: RA015197X

**phillips** | associates

architects / interiors / planners  
87 East Butler Avenue Ambler, PA 19002 p:215.646.7878 www.pa-arch.com

**24 JULY 2026 BID SET**

City Of Chester Police Department

3RD FLOOR  
160 E 7TH STREET  
CHESTER, PA 19013

THIRD FLOOR  
DEMOLITION PLAN

PROJECT NO: 026 072

DRAWN BY:

DATE: 24 JULY 2026

| SCALE. | AS NOTED |
|--------|----------|
| 1      | 1        |
| 2      | 2        |
| 3      | 3        |
| 4      | 4        |
| 5      | 5        |
| 6      | 6        |
| 7      | 7        |
| 8      | 8        |
| 9      | 9        |
| 10     | 10       |
| 11     | 11       |
| 12     | 12       |
| 13     | 13       |
| 14     | 14       |
| 15     | 15       |
| 16     | 16       |
| 17     | 17       |
| 18     | 18       |
| 19     | 19       |
| 20     | 20       |
| 21     | 21       |
| 22     | 22       |
| 23     | 23       |
| 24     | 24       |
| 25     | 25       |
| 26     | 26       |
| 27     | 27       |
| 28     | 28       |
| 29     | 29       |
| 30     | 30       |
| 31     | 31       |
| 32     | 32       |
| 33     | 33       |
| 34     | 34       |
| 35     | 35       |
| 36     | 36       |
| 37     | 37       |
| 38     | 38       |
| 39     | 39       |
| 40     | 40       |
| 41     | 41       |
| 42     | 42       |
| 43     | 43       |
| 44     | 44       |
| 45     | 45       |
| 46     | 46       |
| 47     | 47       |
| 48     | 48       |
| 49     | 49       |
| 50     | 50       |
| 51     | 51       |
| 52     | 52       |
| 53     | 53       |
| 54     | 54       |
| 55     | 55       |
| 56     | 56       |
| 57     | 57       |
| 58     | 58       |
| 59     | 59       |
| 60     | 60       |
| 61     | 61       |
| 62     | 62       |
| 63     | 63       |
| 64     | 64       |
| 65     | 65       |
| 66     | 66       |
| 67     | 67       |
| 68     | 68       |
| 69     | 69       |
| 70     | 70       |
| 71     | 71       |
| 72     | 72       |
| 73     | 73       |
| 74     | 74       |
| 75     | 75       |
| 76     | 76       |
| 77     | 77       |
| 78     | 78       |
| 79     | 79       |
| 80     | 80       |
| 81     | 81       |
| 82     | 82       |
| 83     | 83       |
| 84     | 84       |
| 85     | 85       |
| 86     | 86       |
| 87     | 87       |
| 88     | 88       |
| 89     | 89       |
| 90     | 90       |
| 91     | 91       |
| 92     | 92       |
| 93     | 93       |
| 94     | 94       |
| 95     | 95       |
| 96     | 96       |
| 97     | 97       |
| 98     | 98       |
| 99     | 99       |
| 100    | 100      |

# A1







DAMAGED METAL STUD: LARGE HOLES OR RUST AFFECTING STRUCTURAL INTEGRITY

PROVIDE SECURE ATTACHMENT OF NEW STUD TO DAMAGED STUD @16"O.C. VERT.

NEW METAL STUD SET ADJACENT TO DAMAGED STUD, SAME HEIGHT

REPLACE ANY RUSTED STUDS ENCOUNTERED IN KIND

## 2 METAL STUD REPLACEMENT DETAIL

| REV.# | REV. Date  | REV. Notes                |
|-------|------------|---------------------------|
| △     |            |                           |
| △     |            |                           |
| △     |            |                           |
| △     | 03/12/2026 | ARCHITECTURAL REVISIONS   |
| △     | 12/5/2023  | FIRE ALARM CLARIFICATIONS |
| △     | 08-10-2026 | PERMIT                    |

All drawings, specifications, and related documents are the property of the Architect. They are to be used only for the project and site for which they were prepared. They are not to be reproduced, copied, or otherwise used for any other project, without the written permission of the Architect. The Architect assumes no responsibility for the accuracy or completeness of the information provided by the client. The Architect assumes no responsibility for the accuracy or completeness of the information provided by the client. The Architect assumes no responsibility for the accuracy or completeness of the information provided by the client.

PA Registration: RA015197X

**philips** | associates

architects / interiors / planners  
87 East Butler Avenue Ambler, PA 19002 p.215.646.7878 www.pa-arch.com

**24 JULY 2026 BID SET**

City Of Chester Police Department

### 3RD FLOOR OFFICE RENOVATIONS

160 E 7TH STREET  
CHESTER PA 19013


THIRD ELOOR

I THINK I LOOK  
PROPOSED PLAN

# A2





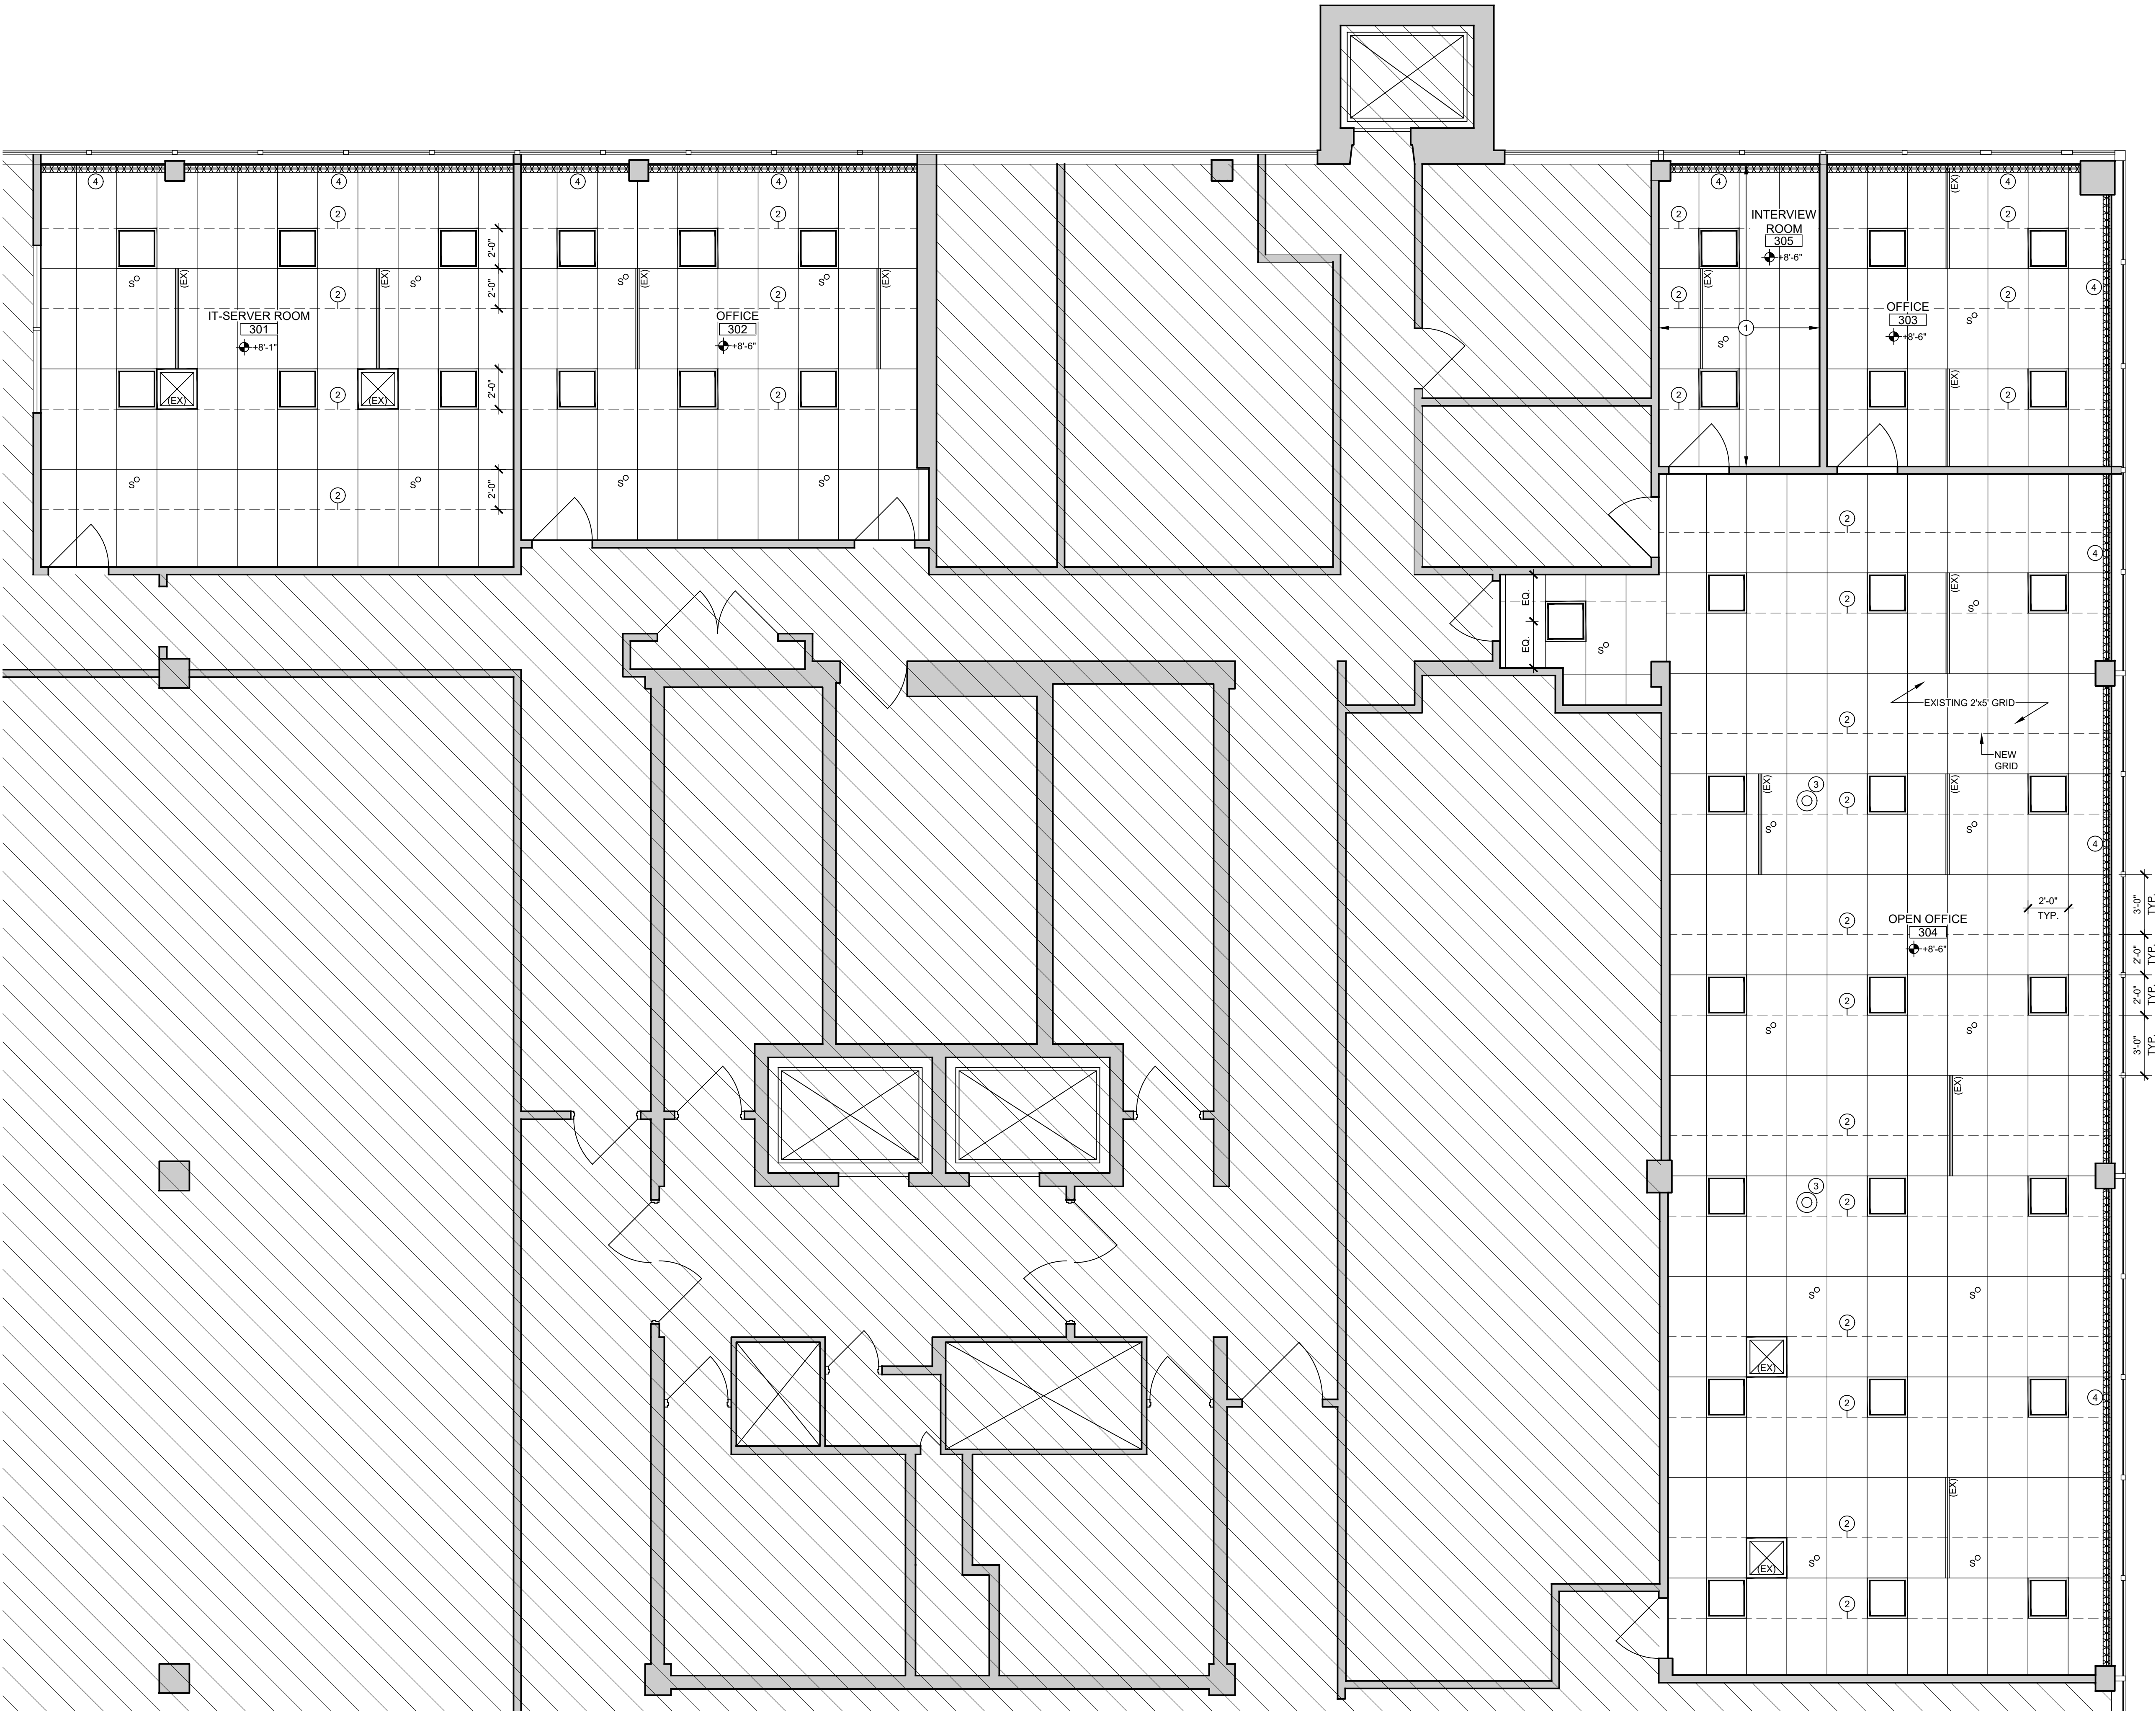

1 THIRD FLOOR REFLECTED CEILING PLAN  
SCALE: 1/4" = 1'-0"

**ELECTRICAL NOTES**

- CH X'-X" INDICATES CEILING HEIGHT ABOVE FINISH FLOOR
- ELECTRICAL CONTRACTOR TO COORDINATE ALL WORK WITH FIXTURES, APPLIANCES AND EQUIPMENT SPECIFIED
- ELECTRICAL CONTRACTOR TO PROVIDE ANY ELECTRICAL WORK NECESSARY FOR FIXTURES, APPLIANCES AND EQUIPMENT SPECIFIC W/TO FULLY OPERATE SUCCESSFULLY WHETHER INDICATED OR NOT
- ALL CEILING GRIDS TO BE PAINTED
- ALL HVAC GRILLS TO BE PAINTED
- ALL EXISTING LIFE SAFETY FIXTURES TO REMAIN

**KEY NOTES**

- PROVIDE 6" THICK MINERAL WOOL SOUND INSULATION OVER ENTIRE CEILING - OVERLAP WALLS.
- DASHED LINE INDICATED NEW CEILING GRID SEGMENT TO REDUCE SIZE OF CEILING TILE.
- RELOCATE EXISTING SPEAKER.
- INSTALL NEW VERTICAL BLINDS AT ALL WINDOW LOCATIONS INDICATED. BASIS OF DESIGN: HUNTER-DOUGLAS. COLOR TBD.

**LEGEND**

|  |                           |  |               |
|--|---------------------------|--|---------------|
|  | ACOUSTICAL CEILING TILE   |  | 2x2 FIXTURE   |
|  | FIRE EXTINGUISHER         |  | RETURN GRILLE |
|  | NEW VERTICAL BLINDS       |  | SUPPLY GRILLE |
|  | EXIT LIGHT                |  | LINEAR GRILLE |
|  | PULL STATION              |  |               |
|  | FIRE ALARM STROBE         |  |               |
|  | SPRINKLER HEAD (EXISTING) |  |               |
|  |                           |  |               |

**PROJECT NORTH**

**ARCHITECTURAL REVISIONS**

| REV.# | REV. DATE  | REV. NOTES                |
|-------|------------|---------------------------|
| 1     | 03/12/2026 | ARCHITECTURAL REVISIONS   |
| 2     | 12/2/2023  | FIRE ALARM CLARIFICATIONS |
| 3     | 03/12/2026 | PERMIT                    |

Plans, specifications, reports, documents, or other information prepared by or for the architect or architect-engineer shall be the property of the architect or architect-engineer and shall remain confidential. No part of this work shall be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of the architect or architect-engineer. Do not scale drawings.